

PRODUCTS AT A GLANCE

Stainless steel tube systems,
tube connections, ball valves, manifolds, vessels,
gaskets and customized solutions.

TUBES & FITTINGS Page 4
Standard, Coax and Connections
Pharma Hoses and Corrugated Stainless Steel Hoses



CUSTOMIZED SOLUTIONS Page 8
Manifolds, Vessels,
and Custom Fittings



BUBBLER SYSTEMS Page 9
Bubblers and Accessories



COMPONENTS & VALVES Page 10
Ball Valves, Purge Tools,
Gas Sticks, Presslok



SERVICE Page 11
Cleanroom, Engineering Support,
EcoPurge, Containers on Trailer Platforms



DOCUMENTATION & CERTIFICATES Page 12
Certified Manufacturing, WebCert,
Customized Documentation




QUALITIES AND SURFACES

HIGHEST STANDARDS WHEN IT COMES TO SURFACE QUALITY AND PURITY

Specific surfaces for secure constructions: Dockweiler has many years of experience and competence in the field of surface optimization and finishing.

Qualities pharmaceutical industry

Qualities semiconductor industry

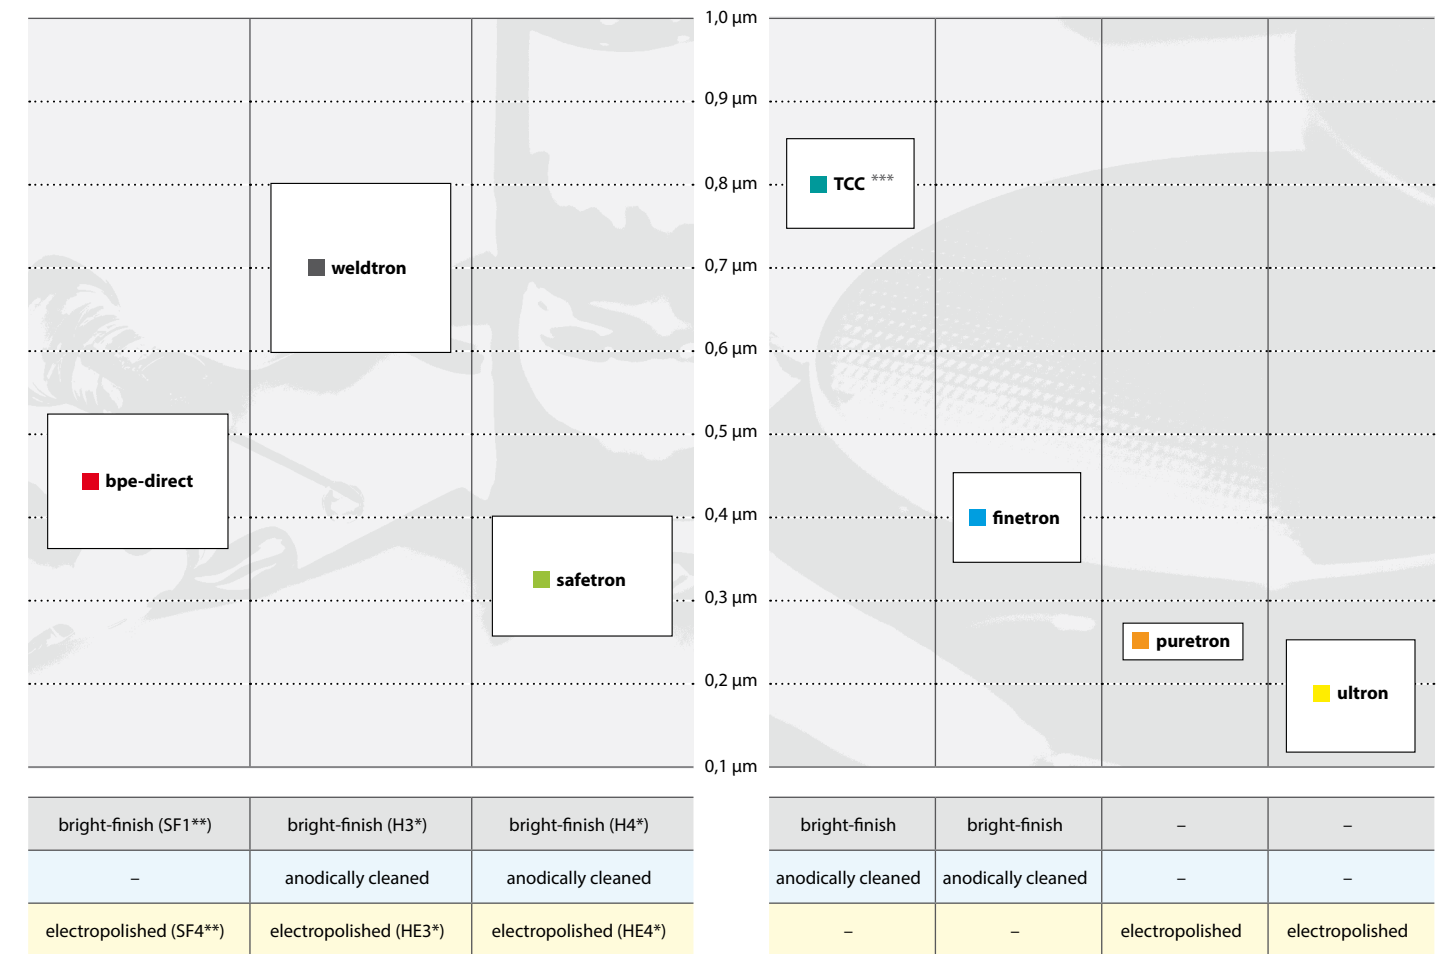

* Hygiene grade in accordance with DIN 11864 / DIN 11865 / DIN 11866. ** in accordance with ASME BPE. *** not defined, Ra 0,80 µm on request



All pictures show the respective surfaces in a 380-fold magnification.

TUBES & FITTINGS

DOCKWEILER STANDARD



Tubes

Elbows

T-pieces

Reducers

Caps

Our tubes and fittings offer the highest standards of surface quality and purity, whether for the semiconductor, pharmaceutical, biotechnology, photovoltaics, or other high-tech industries.

TUBES

For liquids
For gases

Dimensions

Imperial	ISO	Metric
1/8" to 6"	DN 8 to DN 200	DN 4 to DN 150
(3,18 x 0,56 mm to 152,40 x 2,77 mm)	(13,50 x 1,60 mm to 219,10 x 2,60 mm)	(3,00 x 0,50 mm to 154,00 x 2,00 mm)

Pipe

DN 6 to DN 20
(168,28 x 3,40 mm to 508,00 x 5,54 mm)

Instrumentation tubing

0,30 x 0,06 mm to 12,00 x 2,00 mm

ELBOWS

Standard elbows: 45° / 90° / 180°
Special elbows: 30° / 60° / 88° / 92° / Point-of-Use

Dimensions

Imperial	ISO	Metric
1/4" to 6"	DN 8 to DN 100	DN 4 to DN 150
(6,35 x 0,89 mm to 152,40 x 2,77 mm)	(13,50 x 1,60 mm to 114,30 x 2,30 mm)	(6,00 x 1,00 mm to 154,00 x 2,00 mm)

Surfaces Bright-finish, anodically cleaned, electropolished

Materials 1.4404, 1.4435 (BN2), UNS S31603 (316L), UNS S30403 (304L), 1.4539

Qualities ■ **ultron** ■ **puretron** ■ **finetron** ■ **TCC** ■ **VSR 80** ■ **weldtron** ■ **safetron** ■ **bpe-direct**

T-PIECES

Standard: long or short branch/reduced branch
Special T-pieces: 45° branch/excentric branch/Y-piece/
T-piece with valve/thermowell

Dimensions

Imperial	ISO	Metric
1/4" to 6"	DN 8 to DN 100	DN 4 to DN 150
(6,35 x 0,89 mm to 152,40 x 2,77 mm)	(13,50 x 1,60 mm to 114,30 x 2,30 mm)	(6,00 x 1,00 mm to 154,00 x 2,00 mm)

REDUCERS

Standard: concentric/excentric
Special reducers: conc. with joint/exc. with joint

Dimensions

Imperial	ISO	Metric
1/4" to 6"	DN 8 to DN 100	DN 4 to DN 150
(6,35 x 0,89 mm to 152,40 x 2,77 mm)	(13,50 x 1,60 mm to 114,30 x 2,30 mm)	(6,00 x 1,00 mm to 154,00 x 2,00 mm)

CAPS

With weld-on end
Dockweiler cap

Dimensions

Imperial	ISO	Metric
1/4" to 6"	DN 8 to DN 100	DN 4 to DN 150
(6,35 x 0,89 mm to 152,40 x 2,77 mm)	(13,50 x 1,60 mm to 114,30 x 2,30 mm)	(6,00 x 1,00 mm to 154,00 x 2,00 mm)

TUBES & FITTINGS

COAX



Coax tubes

Coax elbows

Coax T-pieces

Sleeves & terminators

Purge tees

The double-wall tube system from Dockweiler, consisting of an inner process tube and an outer safety tube, guarantees safe transport of explosive, toxic, and corrosive media.

TUBES

For liquids
For gases

Dimensions

Imperial
1/4" to 1"
Inner tube: 6,35 x 0,89 mm to 25,40 x 1,65 mm
Outer tube: 12,70 x 1,24 mm to 38,10 x 1,65 mm

ELBOWS

Standard elbows: 45° / 90°

Dimensions

Imperial
1/4" to 1"
Inner tube: 6,35 x 0,89 mm to 25,40 x 1,65 mm
Outer tube: 12,70 x 1,24 mm to 38,10 x 1,65 mm

T-PIECES

Standard: long or reduced branch

Dimensions

Imperial
1/4" to 1"
Inner tube: 6,35 x 0,89 mm to 25,40 x 1,65 mm
Outer tube: 12,70 x 1,24 mm to 38,10 x 1,65 mm

Surfaces Bright-finish, anodically cleaned, electropolished

Materials 1.4404, 1.4435, UNS S31603 (316L)

Qualities ■ **COAX** in accordance with process tube quality: ■ **ultron** ■ **finetron** ■ **TCC** ■ **TCC.1**

SLEEVES

For connecting the coaxial components

Dimensions

Imperial
1/4" to 1"
Inner tube: 6,35 mm to 25,40 mm
Outer tube: 12,70 to 38,10 mm

TERMINATORS

For the transition from a coaxial system to a standard stainless steel tube system

Dimensions

Imperial
1/4" to 1"
Inner tube: 6,35 x 0,89 mm to 25,40 x 1,65 mm
Outer tube: 12,70 x 1,24 mm to 38,10 x 1,65 mm

PURGE TEES

T-piece with VCR connector
bulkhead purge tee

Dimensions

Imperial
1/4" to 1"
Inner tube: 6,35 x 0,89 mm to 25,40 x 1,65 mm
Outer tube: 12,70 x 1,24 mm to 38,10 x 1,65 mm

TUBES & FITTINGS

CONNECTIONS



ZeroCon connection



DIN 11864



Clamp connection



Gaskets

Different applications and media require their own particular connections. Dockweiler offers the ideal connection for every type of application.

ZEROCON

The unique threaded connection is as completely leakproof as a weld seam.

Dimensions

Imperial	ISO	Metric
1/4" to 4"	DN 8 to DN 80	DN 4 to DN 100
(6,35 mm to 101,60 mm)	(13,50 mm to 88,90 mm)	(6,00 x 1,00 mm to 104,00 x 2,00 mm)

CONNECTIONS IN ACCORDANCE WITH DIN 11864

Threaded tube connection /flange connection/clamp connection

Dimensions

Imperial	ISO	Metric
1/4" to 6"	DN 8 to DN 100	DN 4 to DN 150
(6,35 x 0,89 mm to 152,40 x 2,77 mm)	(13,50 x 1,60 mm to 114,30 x 2,30 mm)	(6,00 x 1,00 mm to 154,00 x 2,00 mm)

Surfaces Bright-finish, anodically cleaned, electropolished / ZeroCon: bright-finish, electropolished

Materials 1.4404, 1.4435 (BN2), 1.4539, UNS S31603 (316L), UNS S30403 (304L) / Gaskets materials: EPDM, PTFE, Silicone

Qualities ■ ultron ■ finetron ■ safetron ■ weldtron

CLAMP CONNECTION

Standard: ferrules/caps/clamps/special ferrules with thread or hose connection/tank ferrules
Clamps with wing or hexagon screw/3-segment clamp/high pressure clamp

Dimensions

Imperial	ISO	Metric
1/4" to 6"	DN 8 to DN 100	DN 4 to DN 150
(6,35 x 0,89 mm to 152,40 x 2,77 mm)	(13,50 x 1,60 mm to 114,30 x 2,30 mm)	(6,00 x 1,00 mm to 154,00 x 2,00 mm)

GASKETS

Cleaned and laser-marked in accordance with FDA requirements

Dimensions

Imperial	ISO	Metric
1/4" to 6"	DN 8 to DN 100	DN 4 to DN 150
(6,35 x 0,89 mm to 152,40 x 2,77 mm)	(13,50 x 1,60 mm to 114,30 x 2,30 mm)	(6,00 x 1,00 mm to 154,00 x 2,00 mm)

TUBES & FITTINGS

PHARMA HOSES / CORRUGATED STAINLESS STEEL HOSES



For the use in the semiconductor the fine chemical industry Dockweiler has developed flexible tube systems with a surface quality which meet highest requirements: electropolished corrugated stainless steel hoses.

FLEXTRON

Electropolished corrugated stainless steel hoses for the semiconductor industry and fine chemistry.

Dimensions

Corrugated hoses
DN 6, DN10, DN 20

System lengths
(including welding ends)
6", 12", 24", 36" (up to 60" on request)

OPTIONS

As connection options we offer the corrugated hose with welding ends, VCR or ZeroCon connection.

SURFACES

TCC cleaned, electropolished

MATERIALS

Corrugated hose: 1.4404 / UNS S31603 (316L), Braiding: 1.4301 / UNS S30403 (304L)

PHARMA HOSES

Pharmaceutical hoses in silicone, EPDM and PFA for applications in the pharmaceutical and biotech industries.

Dimensions

Silicone	EPDM	PFA
1/4" to 2" (up to 25 m length)	3/4" to 2" (up to 10 m length)	1/2" to 2" (up to 20 m length)

OPTIONS

As connection options we offer TriClamp connections, Aseptic connections, Welding ends or ZeroCon connection. Further connections on request.

MATERIALS

- MVQ-1** Platinum-cured silicone, braid-reinforced
- MVQ-2** Platinum-cured silicone, braid-reinforced with stainless steel wire reinforcement
- EPDM** Braid-reinforced, with stainless steel wire reinforcement, outside blue EPDM, inside food-grade white EPDM
- PFA-1** PFA liner (white), braid-reinforced with stainless steel wire reinforcement, outside platinum-cured silicone
- PFA-2** PFA liner (black), braid-reinforced with stainless steel wire reinforcement, fully electrically conductive



CUSTOMIZED SOLUTIONS

MANIFOLDS / VESSELS / CUSTOM FITTINGS



R4i manifolds

It all began with the advancement of orbital welding technology to meet the high standards required by the semiconductor industry. Today, the products manufactured by Dockweiler include manifolds with minimal dead space and in various designs – surfaces/purity – and with a range of different outlets.

MANIFOLDS

Dockweiler manufactures and supplies manifolds for UHP, PCW, and CFOS applications for the semiconductor industry.

When manufacturing CIP lances and CIP rings for liquids, Dockweiler places emphasis on elimination of dead space and closely fitted outlets.

The tailored solutions we offer our customers lead to a shorter acceptance process when installing or cleaning.

CUSTOM FITTINGS

Standard fittings do not always fit the equipment. Dockweiler manufactures fittings individually to your specifications, adapting these for your particular application. Drawings and 3.1 documentation can also be provided upon request.

Examples:
Excentric T-pieces, Y-pieces, elbows with customized angle measurements, thermowells

VESSELS

Due to custom production with the elimination of dead space and optimized surfaces, Dockweiler offers its customers vessels that can be emptied completely.

Features

- Can be produced for a volume of up to 200 liters and a diameter of up to 508 mm (20")
- CE certification for Categories I and II
- Pressure equipment in accordance with PED Category II (Pressure Equipment Directive)

Dimensions Imperial, ISO, Metric, in accordance with customer requirements

Surfaces Bright-finish, anodically cleaned, electropolished

Materials 1.4404, 1.4435 (BN2), 1.4306, 1.4307, UNS S31603 (316L), UNS S30403 (304L) / In addition to our standard materials, special materials such as Hastelloy can be used upon request.

Qualities ■ **ultron** ■ **puretron** ■ **finetron** ■ **TCC** ■ **VSR 80** ■ **weldtron** ■ **safetron** ■ **bpe-direct**

BUBBLER SYSTEMS

BUBBLERS / ACCESSORIES



HPL

HPS

Eco

Accessories

Safety in stainless steel – Dockweiler bubblers are vessels for the transport and manufacture of organometallic compounds. Due to the sophisticated production method, electropolishing can be done after the last weld seam. This means that our bubbler can be used in critical areas of application.

SERIE HPL

Bubblers for liquids

Volume

ca. 200 ml to 56 liters

Options

Crossover and various other valves
Level sensor

Approvals

DOT and ADR

SERIE HPS

Bubblers for solids

Volume

ca. 600 ml to 6 liters

Options

Crossover and various other valves
Level sensor

Approvals

DOT and ADR

SERIE ECO

Bubblers for liquids with specially optimized components

Volume

ca. 1,5 liters to 8 liters

Options

–

Approvals

DOT and ADR for ECO8000

ACCESSORIES

Heat exchanger system for bubbler temperature control

HE8002 Temperature control unit

Larger bubblers cannot be used in conventional temperature baths. Dockweiler offers the flexible HE8002 temperature control unit for this. This is connected and supplied via a pump to the supply, temperature, and control unit.

Supply, temperature, and control unit

In the sensitive production process, keeping the temperature of the medium constant is a must. To ensure a constant process temperature, Dockweiler offers a supply, temperature, and control unit. This ensures a constant and stable flow of gas.

Surfaces

p = free of oil and grease / hp = electropolished
uhp = electropolished (incl. the last weld seam)

Materials

1.4404, 1.4435 (BN2), UNS S31603 (316L)
Other special materials such as UNS S30403 (304L), 904L, Hastelloy, or Monel available on request

COMPONENTS AND VALVES

BALL VALVES / PURGE TOOLS / GAS STICKS / PRESSLOK



Ball valves

Purge tools

Gas sticks

Presslok

Evans Components is one of the leading international manufacturers of innovative ball valves, purge gas distributors, and combination fittings for the semiconductor, microelectronics, and pharmaceutical industries. They are the ideal complement to the Dockweiler stainless steel tube systems.

BALL VALVES

Ball valves and mini ball valves for CFOS applications

Dimensions

Imperial
1/4" to 12" (6,35 mm to 304,80 mm)
ISO and Metric on request

PURGE TOOLS

Purge gas distributors

Dimensions

Imperial
Inlet 1/2"
Outlet 1/4"

Surfaces Bright-finish, electropolished

Materials UNS S31603 (316L), UNS S30403 (304L)

GAS STICKS

Combination fitting of mini ball valve, regulator and pressure gauge
GS / GM / GL series

Dimensions

Imperial
1/4" to 1" (6,35 mm to 25,40 mm)

PRESSLOK

Weld-free crimp connection for gas installations or cooling water systems
Tubes and fittings from the PLT / PLHT series

Dimensions

Imperial
1/2" to 4" (12,70 mm to 101,60 mm)

SERVICES

CLEANROOM / ENGINEERING SUPPORT / ECOPURGE / SWAP BODY



CLEANROOM

For semiconductor applications

Having installed a cleanroom, Dockweiler is able to weld, assemble, clean, and pack custom-manufactured products according to the strictest purity requirements

Features

Cleanroom class ISO 4
Cleanroom size ca. 100 m²

ENGINEERING SUPPORT

In close collaboration with the customer, Dockweiler draws on its many years of experience and motivated team of staff to create optimized products.

Technical testing

In addition to standard testing, Dockweiler offers a range of special tests for prefabrication. These include:

- Helium leak testing
- Dye penetrant testing
- Corrosion testing in accordance with ASTM G 61 (CPP)
- X-ray testing of weld seams
- Material hardness testing (Vickers)
- Pressure testing
- Cold stress bath (with liquid nitrogen) before dimensions check
- Water jacket test (DOT approval of bubblers)
- Microscope images (microsections and surface finish)
- PMI = positive material identification (X-ray fluorescence)
- Accuracy of dimensions of 3D geometries

ECOPURGE

The use of the innovative and patented purge dam EcoPurge reduces gas consumption. Schedule reduction is achieved with the EcoPurge since purge time is reduced due to the small trapped volume within the dam.

Dimensions

Available in 3", 4", 6" (tube size) and 6", 8", 10", 12" (pipe size)
Metric, ISO and JIS dimensions upon request



SWAP BODY

Dockweiler offers containers and swap bodies for flexible storage on the construction site.

The containers are equipped with metal racks and cantilever racks, each with five shelves, for safe storage of tubes and fittings. The swap bodies can, for example, be used in the execution of installation and production projects (skid production or system installation).

Benefits

- The containers offer the following advantages:
- safe and manageable outside storage of materials
 - storage capacity easily increased
 - project materials stored separately from actual storage area
 - no risk of confusing different materials in projects

Measurements:

Length of swap body:	7,45 m
External height (standard):	2,70 m
Internal height:	2,48 m
Height of roll-up door:	2,25 m

DOCUMENTATION & CERTIFICATES

CERTIFIED MANUFACTURING



AD 2000 HPO



DIN EN ISO 9001



DIN EN ISO 14001



DGR 2014/68/EU and AD 2000 W0



ASME BPE

Further certificates are available on our website:

www.dockweiler.com

DOCUMENTATION & CERTIFICATES

WEBCERT



Nowadays, for plant operators, documentation such as material inspection certificates is becoming increasingly more important and comprehensive. To support our customers in this development while also improving our service, we have set up a new certifications portal. The Dockweiler's WebCert portal offers the simple solution for everyone who manages their certifications digitally.

All required information can therefore be accessed extremely rapidly, leading to significant time savings. For further Informations please visit our website at: www.dockweiler.com

WEBCERT – ADVANTAGES

- Irrespective of browser, documents can be accessed online from anywhere in the world.
- All documents for past deliveries are held in our archive for an unlimited period.
- The flexible search function allows you to enter several search parameters simultaneously.
- If you do not know the full details of a search parameter, you can search with asterisks.
- WebCert can display an initial preview of the document you are searching for.

SPECIFIC BENEFITS

- You can retrieve documents before the receipt of goods, that is, directly after dispatch of the consignment. As a result, you can assign the documents quickly and directly to the goods upon receipt.
- All required information can therefore be accessed extremely rapidly, leading to significant time savings.
- With no need to file these documents manually, your company's paper and printing costs are reduced.
- WebCert is continually updated with the newest solutions, ensuring it is always optimized and progressive.

Functions	WebCert Basic	WebCert Advanced
Access to documents	12 month	24 month
Concurrent user licenses	1	2
Easy search functions	■	■
Certificates and reports	■	■
Weld log/Welding certificates *	■	■
Welding procedure specification (WPS)	■	■
Procedure qualification record (PQR)	■	■
Welder performance qualification (WPQ)	■	■
Advanced search		■
Delivery notes		■
Order confirmations		■
Invoices		■
ZIP download of selected documents		■

* on request


CATALOGS

DOCKWEILER PUBLICATIONS



Our catalogs are also available for download on our website at: www.dockweiler.com

Company Profile



Products at a Glance



UHP-Solutions



Technical Catalogue




ASME BPE Catalogue




EcoPurge



Bubbler Systems



Pharmaceutical hoses



Flextron



Contact information

Dockweiler AG

An der Autobahn 10/20
19306 Neustadt-Glewe
Germany

Tel.: +49 38757 58 0

Fax: +49 38757 58 222

E-Mail: sales@dockweiler.com

Internet: www.dockweiler.com

